


# Channelrain®... quality makes a lasting impression.

Wheeling controls Channelrain's production from the pouring of molten steel to galvanizing to finished panel. The result is good looking roofing and siding that holds up under years of punishing weather. Tough, lightweight 38" panels (36" cover) are easy to install. Wide side laps add extra strength, keep out the elements. An exclusive leakproof drain channel stays snug, weathertight, assures dry interiors.

Channelrain's distinctive ribbing was designed by engineers who understand the dynamics of steel roofing and siding, and who have an eye for the visual appeal of the finished building. Major ribbing is on 6" centers for strength and a bold, clean shadow line. Intermediate ribbing adds a subtle textured look perfect for a wide variety of agricultural, light industrial, commercial, and residential applications.

## Channelrain is part of The System™

Channelrain's enhanced performance is a product of The System: the most tightly quality-coordinated manufacturing and paint finishing process in the industry. Every step—from 100 percent Wheeling-Pittsburgh galvanized steel through roll forming—is engineered to deliver roofing and siding with increased durability, a superior finish, and greater value. Value spelled out in a rock-solid performance certification.

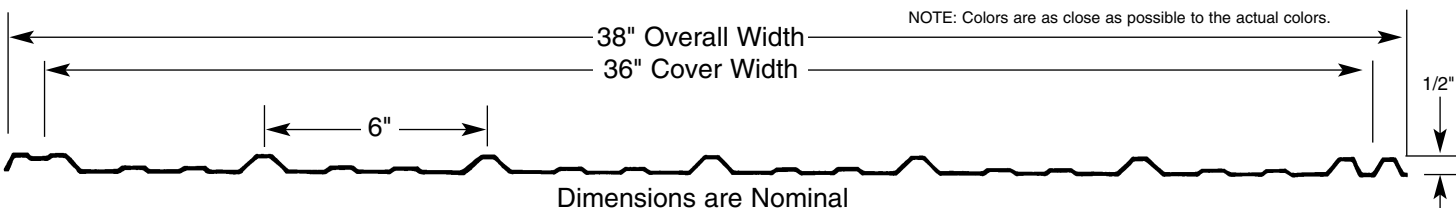

## Channelrain quick specs

- Full-hard 100,000-plus psi galvanized steel.
- Popular 38" width (36" cover), in lengths from 6 thru 40 feet, in even one inch increments.
- Available in galvanized G-90 and fourteen rich, baked-on enamel colors.
- Major ribbing on 6" centers for strength, snug fit, clean lines.
- 29 gauge (28 and 26 on special order).
- Also available: 2 oz. Seal of Quality—a sheet that is heavier and with an extra thick zinc coating for extra wear and long life. We're so confident of its durability, we provide 2 oz. Channelrain with its own 20 year limited warranty.

## Safe Uniform Load Table (Lbs. Per Sq. Ft.)

Purlin Spacing	24"	30"	36"	42"
Triple Span	134	84	54	34


### NOTES:

1. Table lists safe uniform total load capacity based on unrestrained continuous spans (4 or more supports).
2. Design stress will not exceed 48,000 psi and deflection is limited 1/100th of the span.

Wheeling Corrugating Company reserves the right to change the design and/or specifications of its products without notice.

## Drain Channel

The exclusive drain channel guards against wind, rain, and snow... assures dryness.

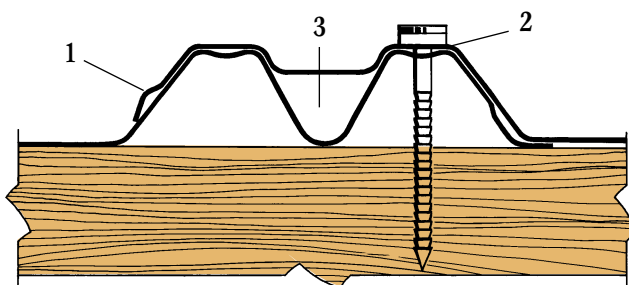

1. Wide overlap: increases strength and leak protection at each joint.
2. Wide nailing surface: makes nailing easier and faster.
3. Drain channel: the exclusive leakproof system that prevents capillary action; stays weathertight. This Wheeling feature has ensured snug, dry interiors in thousands of applications since 1924.

