



**Wheeling
Corrugating**

CHANNELDRAIN 2000™

Roofing and Siding



Wheeling Corrugating
SpectraCote™
SYSTEM
roofing & siding products

CHANNELDRAIN 2000™... tackles tough weather and does it handsomely.

Channeledrain 2000 roofing and siding is engineered to stay bright, tight, and durable well into the next century. Crisp, chalk-free colors; an appealing profile; and rugged, no-nonsense construction combine to give you a cost-efficient, contemporary building material perfect for a wide variety of agricultural, light industrial, commercial, and residential applications.

The heart of Channeledrain 2000's durability is full-hard, 100,000-plus psi, high-tensile galvanized steel. A computer-aided profile design and an exclusive, non-leak drain channel add rigidity, strength, and the assurance of tight side laps and a dry, snug interior: strength and performance that will hold up under years of punishing weather and typical day-in-day-out hard use.

CHANNELDRAIN 2000 is part of The SpectraCote System

Channeledrain 2000's enhanced performance is a product of The SpectraCote System: the most tightly quality-coordinated manufacturing and paint finishing process in the industry. Every step-from 100 percent Severstal/North America galvanized steel through roll forming-is engineered to deliver roofing and siding with increased durability, a superior finish, and greater value. Value spelled out in a rock-solid performance certification.



*Meets Energy Star reflectivity standards. Color selections are representations. The exact color match may be limited by printing or viewing conditions.

CHANNELDRAIN 2000™



CHANNELDRAIN 2000™ Quick Specs

- Full-hard 100,000-plus psi galvanized steel.
- Popular 38" width (36" cover), in lengths from 6 thru 42 feet, in even 1" increments.
- Available in galvanized G-90 and fourteen rich, baked-on enamel colors.
- Deep ribs on 9" centers for strength, "board and batten" look.
- 29 gauge (26 on special order).
- Also available: 2 oz. Seal of Quality-a sheet that is heavier and with an extra thick zinc coating for extra wear and long life. We're so confident of its Durability, we provide 2 oz. Channeledrain 2000 with its own 20 year limited warranty.

Allowable Uniform Load Table (Lbs. Per Sq. Ft.)

Purlin Spacing	24"	30"	36"	42"	48"	54"
Triple Span	126	81	56	41	31	25

Notes:


1. Maximum allowable loads shown are based upon a continuous three span sheet application.
2. Loads are based upon use of 80,000 psi yield steel. Channeledrain 2000 roofing and siding is manufactured in accordance with ASTM specifications noted in "Steel Roofing Sheets" latest edition.

Wheeling Corrugating Company reserves the right to change the design and/or specifications of its products without notice.

Call toll free 877-333-0900 • Fax 800-787-2812 • www.wheelingcorrugating.com



Advanced Product Design

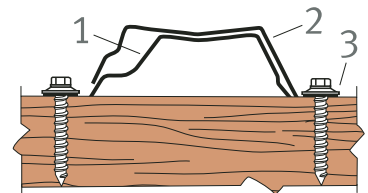

1. Drain channel: exclusive leak-proof drain channel guards against wind, rain, and snow, adds strength to each joint; prevents capillary action; stays weather tight; interiors stay dry, snug.
2. Special crisp, clean rib shape: incorporates steep angles in a new design feature that translates to extraordinary strength and leak protection.
3. Wide, flat surface allows easy centering, quick fastening.

